

A.LEDA WASH K20 TW


- I DIAGRAMMI FOTOMETRICI
- D FOTOMETRICHE DIAGRAMME
- GB PHOTOMETRIC DIAGRAMS
- E DIAGRAMOS FOTOMÉTRICOS
- F DIAGRAMMES PHOTOMETRIQUES

Legenda Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.
Key Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.
Légende Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.
Legende Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw.50% maximaler Ausleuchtung.
Leyenda Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.

Minimum Zoom with COOL white (16.7° 10% - 8.8° 50%)

Total Output: 10100 lumens

lux (fc) 0 35422 (3291) 12752 (1185) 3188 (296) 1417 (132)

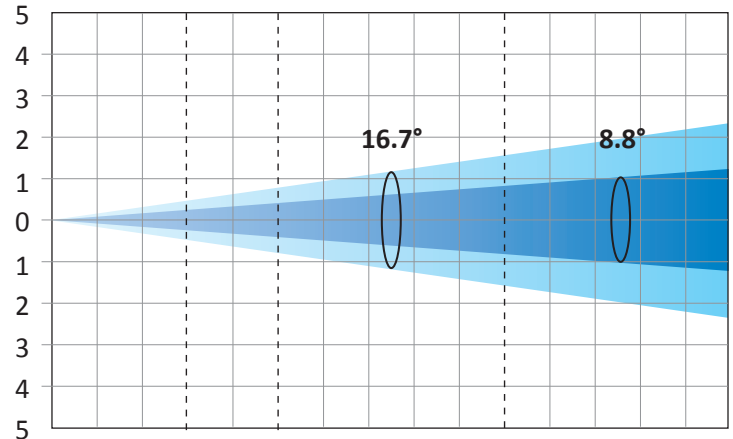


Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	0.88 (2' 11")	1.47 (4' 10")	2.94 (9' 8")	4.40 (14' 5")
Diameter 50%	m (ft in)	0	0.46 (1' 6")	0.77 (2' 6")	1.54 (5' 1")	2.31 (7' 7")

Minimum Zoom with WARM white (16.7° 10% - 8.8° 50%)

Total Output: 6000 lumens

lux (fc) 0 20906 (1942) 7526 (699) 1882 (175) 836 (77.7)

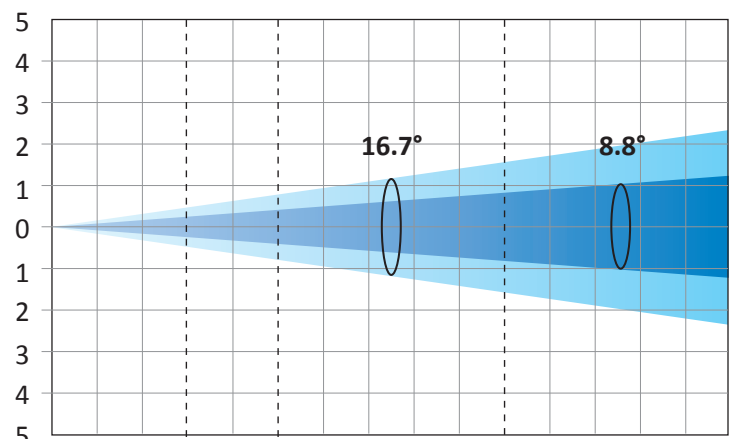

Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	0.88 (2' 11")	1.47 (4' 10")	2.94 (9' 8")	4.40 (14' 5")
Diameter 50%	m (ft in)	0	0.46 (1' 6")	0.77 (2' 6")	1.54 (5' 1")	2.31 (7' 7")


A.LEDA WASH K20 TW

- I DIAGRAMMI FOTOMETRICI
- D FOTOMETRICHE DIAGRAMME
- GB PHOTOMETRIC DIAGRAMS
- E DIAGRAMOS FOTOMÉTRICOS
- F DIAGRAMMES PHOTOMETRIQUES

Minimum Zoom with COOL & WARM white (16.7° 10% - 8.8° 50%)

Total Output: 14300 lumens

lux (fc) 0 50397 (4682) 18143 (1685) 4536 (421) 2016 (187)

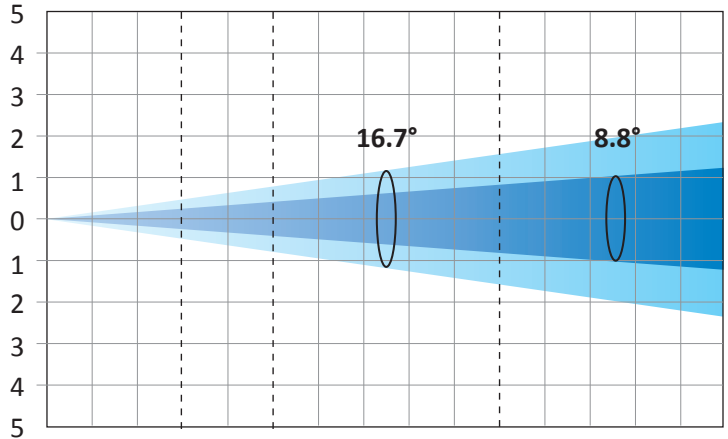


Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	0.88 (2' 11")	1.47 (4' 10")	2.94 (9' 8")	4.40 (14' 5")
Diameter 50%	m (ft in)	0	0.46 (1' 6")	0.77 (2' 6")	1.54 (5' 1")	2.31 (7' 7")

Maximum Zoom with COOL white (69.5° 10% - 43.6° 50%)

Total Output: 9000 lumens

lux (fc) 0 1532 (142) 552 (51.2) 138 (12.8) 61 (5.69)

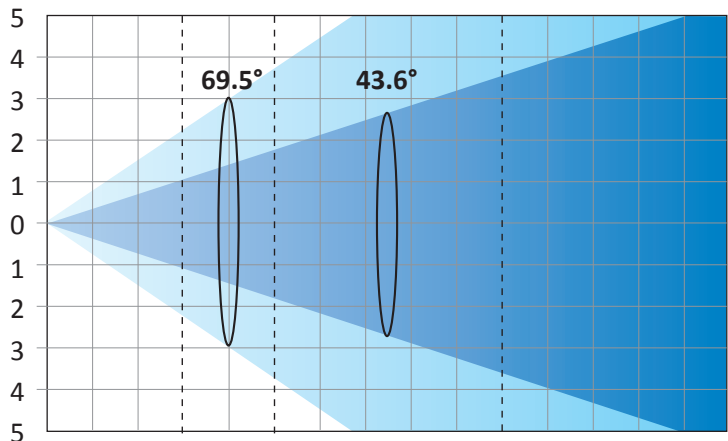

Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	4.16 (13' 8")	6.94 (22' 9")	13.87 (45' 6")	20.81 (68' 3")
Diameter 50%	m (ft in)	0	2.40 (7' 10")	4.00 (13' 1")	8.00 (26' 3")	12.00 (39' 4")


A.LEDA WASH K20 TW

- I** DIAGRAMMI FOTOMETRICI
- GB** PHOTOMETRIC DIAGRAMMS
- F** DIAGRAMMES PHOTOMETRIQUES

- D** FOTOMETRICHE DIAGRAMME
- E** DIAGRAMOS FOTOMÉTRICOS

Maximum Zoom with WARM white (69.5° 10% - 43.6° 50%)


Total Output: 5500 lumens

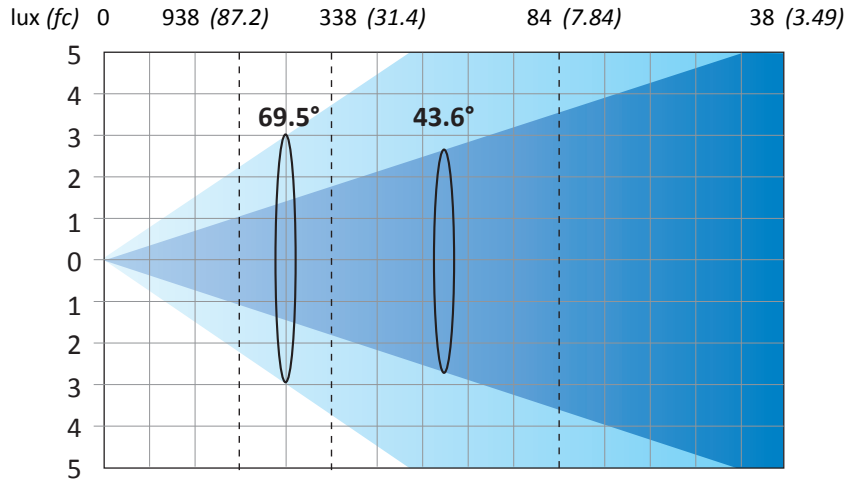

Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	4.16 (13' 8")	6.94 (22' 9")	13.87 (45' 6")	20.81 (68' 3")
Diameter 50%	m (ft in)	0	2.40 (7' 10")	4.00 (13' 1")	8.00 (26' 3")	12.00 (39' 4")

Maximum Zoom with COOL & WARM white (69.5° 10% - 43.6° 50%)

Total Output: 12900 lumens

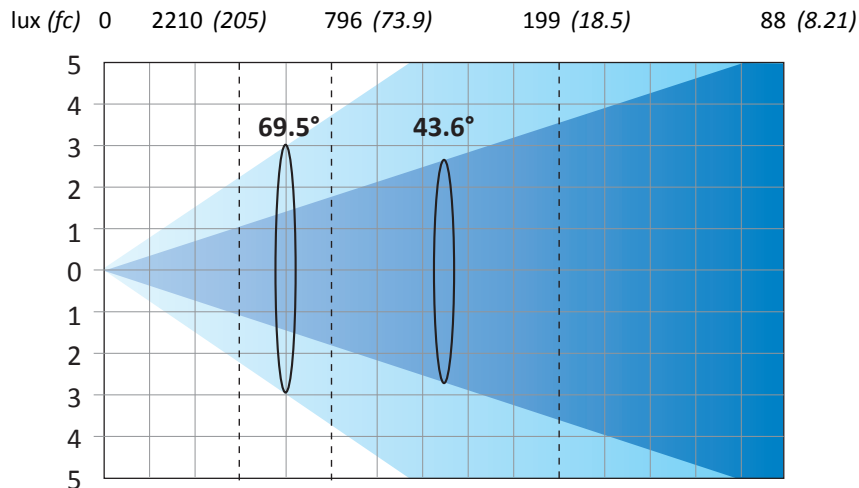

Distance	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
Diameter 10%	m (ft in)	0	4.16 (13' 8")	6.94 (22' 9")	13.87 (45' 6")	20.81 (68' 3")
Diameter 50%	m (ft in)	0	2.40 (7' 10")	4.00 (13' 1")	8.00 (26' 3")	12.00 (39' 4")

A.LEDA WASH K20 TW

- I DIAGRAMMI FOTOMETRICI
- GB PHOTOMETRIC DIAGRAMS
- F DIAGRAMMES PHOTOMETRIQUES

- D FOTOMETRICHE DIAGRAMME
- E DIAGRAMOS FOTOMÉTRICOS

