

FREELINE 60 FC



The extra Compact
and Stylish LED
bar for indoor and
outdoor
installations

8 x OSTAR RGBW LEDs
HIGH QUALITY COLOR MIXING
CHOICE OF DIFFERENT
BEAM ANGLES
IP65 WATERPROOF LED BAR
VERSATILE AND COMPACT
CUSTOMIZABLE FOR
DIFFERENT APPLICATIONS
DMX-CONTROLLED

FREELINE 60 FC is a powerful LED bar in a very compact size. Developed with a stylish design, it is suitable for indoor or outdoor applications (IP65-rated). FREELINE 60 FC is available with different beam angles and it can be fitted with additional filters to further enlarge its projections range. The unit can be powered by an external DRIVENET power supply / controller.



FREELINE 60 FC



OUTPUT

Light source: 8 full color LEDs (RGBW)
 3440 Lumens @ 700 mA
 LED lifespan: 50,000 hours (70% lumen output)

OPTICAL GROUP

3 lenses sets available:
 25.9°, 42°, 60° x 10°

INTERFACE / CONTROL / PROGRAMMING

Interface: DMX 512 / RDM or ArtNet (via DRIVENET series)

POWER SUPPLY

DRIVENET 832, DRIVENET 416
 (electronic full-range 100-240 Vac 50/60 Hz)
 or DRIVENET 1664
 (180-260 Vac 50/60 Hz)
 Power consumption: max 80 W

CONNECTORS

30 cm cable with M12 male connector


OPERATING AMBIENT TEMPERATURE

-10° / 40°

PHYSICAL

Weight: 1.5 Kg
 Dimensions: W 602 mm x D 51 mm x H 65 mm

LEDs current 700mA

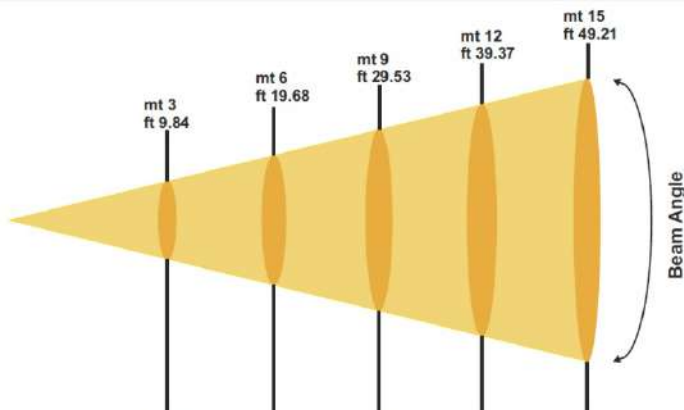

Lux center [lx]	1267	317	141	79	51
Foot candles [fc]	118	29	13	7	5
Diameter [cm]	138	276	414	552	690
Diameter [ft]	4.53	9.05	13.58	18.11	22.83
Lux center [lx]	850	213	94	53	34
Foot candles [fc]	79	20	9	5	3
Diameter [cm]	230	461	691	921	1152
Diameter [ft]	7.56	15.11	22.67	30.23	37.78
Lux center [lx]	1929	482	214	121	77
Foot candles [fc]	179	45	20	11	7
Diameter [cm]	346	693	1039	1386	1732
Diameter [ft]	11.37	22.73	34.10	45.46	56.83
Diameter [cm]	52	105	157	210	262
Diameter [ft]	1.72	3.44	5.17	6.89	8.61

Beam Angle 25,9°

Beam Angle 42°

Beam Angle 60°
 X-axis

Beam Angle 10°
 Y-axis