

MINI BRICK



The base
of any
Lighting Design,
just smaller.

12 x OSRAM OSTAR STAGE N
RGBW LEDs

HIGH-QUALITY COLOR MIXING
QUICKLY INTERCHANGEABLE
BEAM ANGLES

IP65 RATED

DESIGNED FOR BOTH
TEMPORARY AND PERMANENT
INSTALLATIONS

BUILT-IN FULL-RANGE PSU
EXTREMELY COMPACT AND
LIGHTWEIGHT

THE BEST VALUE FOR MONEY



The new MINI BRICK is a powerful, self-contained, IP65 LED Wash light in an ultra-compact case.

MINI BRICK is suitable for various purposes, offering a range of projection angles quickly interchangeable (no tools required). MINI BRICK comes with an IP65 power cable plus 2 DMX cables with M / F XLR connectors (all IP65), that make it perfect for temporary lighting applications, but also for safe long-lasting installations.

Built with top quality components, MINI BRICK gives you the best value for money by efficient design and full production automation.



MINI BRICK



LED TECHNOLOGY

12 x Osram Ostar Stage N Full Color (RGBW) LEDs

OPTICAL GROUP

8° projection angle
Range of quick-mounting holographic filters included: 20° / 40° / 60x10° (no mounting tools required)
Uniform projection on surfaces

COLOR GENERATION

16 million colors
Wide palette of pure uniform whites with variable linear color temperature (2700 K – 8000 K)

INTERFACE / CONTROL / PROGRAMMING

4-digit 7-segment LED display
+ 4 soft keys: control/management/monitoring of the main parameters
Controlled via DMX 512 and RDM standard digital communication protocols
Internal operating system updatable via DTS RED BOX interface

DMX

10 DMX channels

POWER SUPPLY

Built-in full-range PSU
100-240 Vac 50/60 Hz
Power consumption: 200 VA max

CONNECTIONS

Stripped power cable;
2 x DMX cables with Neutrik XLR 5-pole In / Out IP65 connectors.
Included: PowerCON TRUE1 Male / Female cable connectors

Available: permanent installation kit (IP67); power connector + 2 x DMX In / Out connectors

OPERATING AMBIENT TEMPERATURE


-10° / 40°

PHYSICAL

Weight / Dimensions: 6.5 Kg
WxHxD 294 x 246 x 170 mm

INTERNATIONAL CERTIFICATIONS

CE Certification

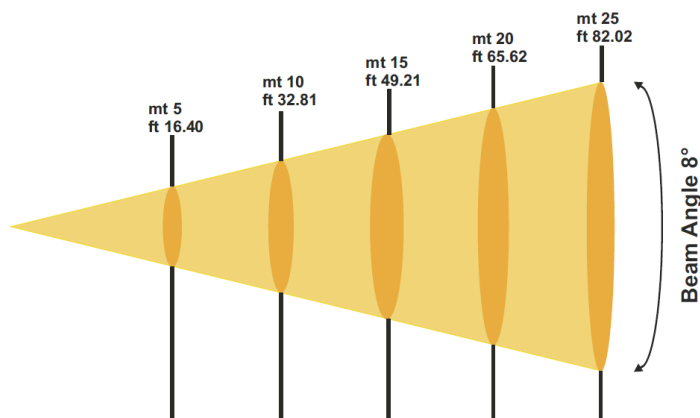

RED	Lux center [lx]	2384	596	265	149	95
	Foot candles [fc]	222	55	25	14	9
GREEN	Lux center [lx]	4310	1078	479	269	172
	Foot candles [fc]	401	100	45	25	16
BLUE	Lux center [lx]	315	79	35	20	13
	Foot candles [fc]	29	7	3	2	1
WHITE	Lux center [lx]	5282	1321	587	330	211
	Foot candles [fc]	491	123	55	31	20
FULL RGBW	Lux center [lx]	6767	1692	752	423	271
	Foot candles [fc]	629	157	70	39	25
BEAM ANGLE	Diameter [cm]	70	140	210	280	350
	Diameter [ft]	2,29	4,59	6,88	9,18	11,47