

CHANNEL FUNCTIONS

GLOW UP C

CHANNEL	CHANNEL MODE
1	RED
2	GREEN
3	BLUE
4	WHITE
5	DIMMER
6	STOP / STROBE
7	MACRO COLOR

GLOW UP TW


CHANNEL	CHANNEL MODE (Colour temperature)		
	INDEPENDENT	CONSTANT INTENSITY	MAX INTENSITY
1	COOL WHITE 6200K	TUNABLE WHITE	TUNABLE WHITE
2	WARM WHITE 2700K	DIMMER	DIMMER
3	STOP / STROBE	STOP / STROBE	STOP / STROBE

GLOW UP W

CHANNEL	CHANNEL MODE
1	DIMMER
2	STOP / STROBE

GLOW UP C

• COLOUR MIXING - channel 1 - 2 - 3

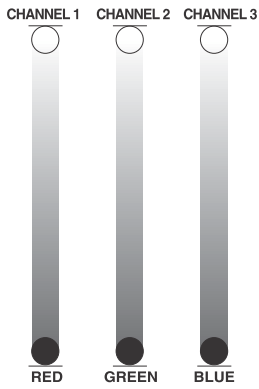

BIT	EFFECT
255	MAX BRIGHTNESS
0	LED OFF

• WHITE - channel 4



BIT	EFFECT
255	MAX BRIGHTNESS
0	LED OFF

• DIMMER - channel 5



BIT	EFFECT
255	MAX BRIGHTNESS
0	LED OFF

• STOP / STROBE - channel 6

BIT	EFFECT
251 ÷ 255	OPEN
238 ÷ 250	RANDOM STROBE FAST
225 ÷ 237	RANDOM STROBE MEDIUM
212 ÷ 224	RANDOM STROBE SLOW
207 ÷ 211	OPEN
141 ÷ 206	CLOSING PULSE FAST→SLOW
75 ÷ 140	OPENING PULSE SLOW→FAST
70 ÷ 74	OPEN
4 ÷ 69	STROBE SLOW→FAST
0 ÷ 3	OPEN



• MACRO COLOR - channel 7

BIT	EFFECT
248 - 255	COLD TONE
240 - 247	WARM TONE
232 - 239	PASTEL TONE
224 - 231	SEQ1
220 - 223	SKELTON EXOTIC SANGRIA
216 - 219	FLESH PINK
212 - 215	CHERRY ROSE
208 - 211	MAYAN SUN
204 - 207	LIGHT SALMON
200 - 203	COOL BLUE
196 - 199	URBAN BLUE
192 - 195	ROSE INDIGO
188 - 191	ALICE BLUE
184 - 187	BRIGHT BLUE
180 - 183	MAUVE
176 - 179	ENGLISH ROSE
172 - 175	FIRE
168 - 171	SURPRISE PEACH
164 - 167	SCARLET
160 - 163	SURPRISE PINK
156 - 159	JUST BLUE
152 - 155	CHOCOLATE
148 - 151	DARK LAVENDER
144 - 147	APRICOT
140 - 143	PALE LAVENDER
136 - 139	DEEP GOLDEN AMBER
132 - 135	GOLDEN AMBER
128 - 131	MEDIUM BLUE
124 - 127	BRIGHT PINK
120 - 123	DARK BLUE
116 - 119	MED BLUE GREEN
112 - 115	BLUE 2
108 - 111	MAGENTA 2
104 - 107	DARK PINK
100 - 103	LIGHT ROSE
96 - 99	ORANGE 2
92 - 95	STRAW
88 - 91	YELLOW 2
84 - 87	WHITE 2500
80 - 83	WHITE 3200
76 - 79	WARM WHITE
72 - 75	COOL WHITE
68 - 71	FULL WHITE
64 - 67	SKY BLUE
60 - 63	AQUAMARINE
56 - 59	VIOLET
52 - 55	PINK
48 - 51	ORANGE
44 - 47	WHITE
40 - 43	MAGENTA
36 - 39	CYAN
32 - 35	YELLOW
28 - 31	BLUE
24 - 27	GREEN
20 - 23	RED
0 - 19	NONE

GLOW UP TW

INDEPENDENT MODE
INDEPENDENT
COOL WHITE 6200K
WARM WHITE 2700K
STOP / STROBE

CONSTANT INTENSITY & MAX INTENSITY MODE	
CONSTANT INTENSITY	MAX INTENSITY
TUNABLE WHITE	TUNABLE WHITE
DIMMER	DIMMER
STOP / STROBE	STOP / STROBE

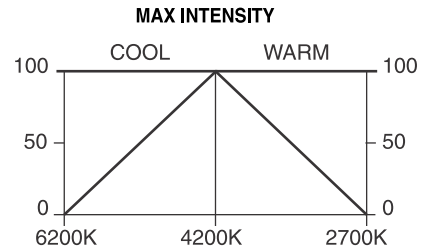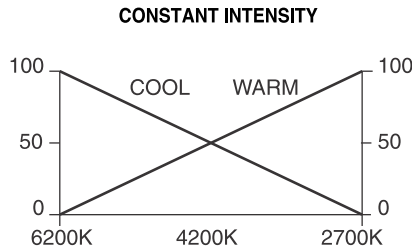

• COOL WHITE - channel 1



BIT	EFFECT
255	MAX BRIGHTNESS
0	LED OFF

• TUNABLE WHITE - channel 1



BIT	EFFECT
255	WARM WHITE
0	COOL WHITE

• WARM WHITE - channel 2



BIT	EFFECT
255	MAX BRIGHTNESS
0	LED OFF

• DIMMER - channel 2



BIT	EFFECT
255	MAX BRIGHTNESS
0	LED OFF

• STOP / STROBE - channel 3

BIT	EFFECT
251 ÷ 255	OPEN
238 ÷ 250	RANDOM STROBE FAST
225 ÷ 237	RANDOM STROBE MEDIUM
212 ÷ 224	RANDOM STROBE SLOW
207 ÷ 211	OPEN
141 ÷ 206	CLOSING PULSE FAST→SLOW
75 ÷ 140	OPENING PULSE SLOW→FAST
70 ÷ 74	OPEN
4 ÷ 69	STROBE SLOW→FAST
0 ÷ 3	OPEN

• STOP / STROBE - channel 3

BIT	EFFECT
251 ÷ 255	OPEN
238 ÷ 250	RANDOM STROBE FAST
225 ÷ 237	RANDOM STROBE MEDIUM
212 ÷ 224	RANDOM STROBE SLOW
207 ÷ 211	OPEN
141 ÷ 206	CLOSING PULSE FAST→SLOW
75 ÷ 140	OPENING PULSE SLOW→FAST
70 ÷ 74	OPEN
4 ÷ 69	STROBE SLOW→FAST
0 ÷ 3	OPEN

GLOW UP W

• DIMMER - channel 1



BIT	EFFECT
255	MAX BRIGHTNESS
0	LED OFF

• STOP / STROBE - channel 2

BIT	EFFECT
251 ÷ 255	OPEN
238 ÷ 250	RANDOM STROBE FAST
225 ÷ 237	RANDOM STROBE MEDIUM
212 ÷ 224	RANDOM STROBE SLOW
207 ÷ 211	OPEN
141 ÷ 206	CLOSING PULSE FAST→SLOW
75 ÷ 140	OPENING PULSE SLOW→FAST
70 ÷ 74	OPEN
4 ÷ 69	STROBE SLOW→FAST
0 ÷ 3	OPEN