

SCENA LED 200



The super-bright
LED alternative
to conventional
lights.

HIGH-POWER WHITE LED
SOURCE

FLICKER FREE PROJECTION

HIGH-EFFICIENCY 6.5° - 70°
LINEAR ZOOM CRI > 95

LONG LIFE LED (50,000 HOURS)

NOISELESS OPERATION

DMX / RDM CONTROL

LOW POWER CONSUMPTION



SCENA LED 200 is a high power, compact, lightweight LED projector suitable for TV studios, theatres, museums, exhibitions, events.

SCENA LED 200 is the most up-to-date alternative to conventional lights, offering technical features that dramatically improve light quality and flexibility of use: CRI>95, flicker-free projection, DMX/RDM remote control, noiseless operation, virtually zero maintenance costs, lower power consumption.

SCENA LED 200 is contained in a strong housing with folded edges, designed to withstand a continuous



SCENA LED 200



OUTPUT

Single high-power white LED (3000 K)
CRI>95
15000 Lumens
Also available with 4000K and 5600K LEDs
LED lifespan: 50,000 hours

OPTICAL GROUP

Ø 150 mm Fresnel lens
6.5° - 70° linear zoom

INTERFACE / CONTROL / PROGRAMMING

DMX 512 / RDM
4 DMX channels default) or 1 DMX channel
4-digit 7-segment LED display

POWER SUPPLY

Electronic full-range 100-240 Vac 50 / 60 Hz
Power consumption: 200 W max

CONNECTIONS

Power supply: PowerCON TRUE1 In / Out;
DMX: XLR 5-pole In / Out

OPERATING AMBIENT TEMPERATURE


-10° / 40°

PHYSICAL

Weight: 8.1 Kg
Dimensions: 397x270x358 h mm
Strong housing with folded edges

INTERNATIONAL CERTIFICATIONS

CE certification

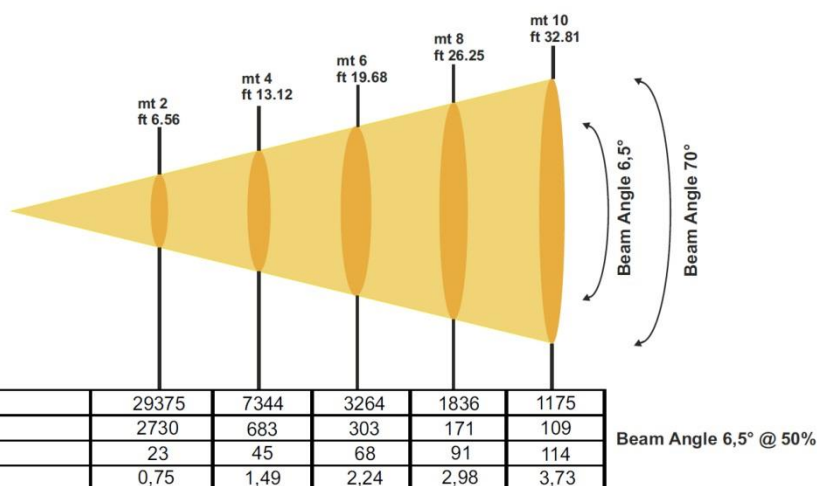

Lux center [lx]	2400	600	267	150	96
Foot candles [fc]	223	56	25	14	9
Diameter [cm]	280	560	840	1120	1400
Diameter [ft]	9,19	18,38	27,57	36,76	45,94

Beam Angle 70° @ 10%